

DS-2CD1123G0E-I
2 MP Fixed Dome Network Camera



- High quality imaging with 2 MP resolution
- Efficient H.265+ compression technology
- Clear imaging against strong back light due to DWDR technology
- Water and dust resistant (IP67) and vandal resistant (IK10)
- EXIR 2.0: advanced infrared technology with long IR range

▪ Specification

Camera	
Image Sensor	1/2.7" Progressive Scan CMOS
Max. Resolution	1920 × 1080
Min. Illumination	Color: 0.01 Lux @(F2.0, AGC ON), B/W: 0 Lux with IR
Shutter Time	1/3 s to 1/100,000 s
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 355°, tilt: 0° to 75°
Lens	
Focal Length & FOV	2.8 mm, horizontal FOV 112.1°, vertical FOV 60.0°, diagonal FOV 132.2° 4 mm, horizontal FOV 90.2°, vertical FOV 48.6°, diagonal FOV 107.6°
Lens Mount	M12
Focus	Fixed
Aperture	F2.0
Illuminator	
Supplement Light Type	IR
Supplement Light Range	Up to 30 m
IR Wavelength	850 nm
Video	
Main Stream	50 Hz: 25 fps (1920 × 1080, 1280 × 720) 60 Hz: 30 fps (1920 × 1080, 1280 × 720)
Sub-Stream	50 Hz: 25 fps (640 × 480, 640 × 360) 60 Hz: 30 fps (640 × 480, 640 × 360)
Video Compression	Main Stream: H.265/H.264/H.264+/H.265+ Sub-Stream: H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 8 Mbps
H.264 Type	Baseline Profile/Main Profile/High Profile
H.265 Type	Main Profile
Region of Interest (ROI)	1 fixed region for main stream
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, SNMP, IGMP, QoS, IPv6, Bonjour, IPv4, UDP, SSL/TLS
Simultaneous Live View	Up to 6 channels
API	Open Network Video Interface, ISAPI
User/Host	Up to 32 users. 3 levels: administrator, operator and user
Client	iVMS-4200, Hik-Connect
Web Browser	Plug-in required live view: IE 10+ Plug-in free live view: Chrome 57.0+, Firefox 52.0+ Local service: Chrome 57.0+, Firefox 52.0+
Image	
Image Settings	Saturation, brightness, contrast, sharpness, AGC, white balance adjustable by client software or web browser.
Day/Night Switch	Day, Night, Auto, Schedule
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancement	BLC, 3D DNR

Interface	
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
Event	
Basic Event	Motion detection, video tampering alarm, exception
Linkage	Upload to FTP, notify surveillance center, send email
General	
Power	12 VDC $\pm$ 25%, 0.4 A, max. 5 W, $\varnothing$ 5.5 mm coaxial power plug PoE: 802.3af, Class 3, 36 V to 57 V, 0.2 A to 0.15 A, max. 6.5 W
Material	Metal & Plastic
Dimension	$\varnothing$ 110 mm $\times$ 82.4 mm ($\varnothing$ 4.4" $\times$ 3.2")
Package Dimension	134 mm $\times$ 134 mm $\times$ 108 mm (5.3" $\times$ 5.3" $\times$ 4.3")
Weight	Approx. 410 g (0.9 lb.)
With Package Weight	Approx. 610 g (1.3 lb.)
Storage Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity: 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity: 95% or less (non-condensing)
Language	English, Ukrainian
General Function	Anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter
Approval	
EMC	FCC (47 CFR Part 15, Subpart B) CE-EMC (EN 55032:2015, EN 61000-3-2:2019, EN 61000-3-3:2013+A1:2019, EN 50130-4:2011+A1:2014) RCM (AS/NZS CISPR 32:2015) IC (ICES-003: Issue 7) KC (KN32:2015, KN35:2015)
Safety	UL (UL 62368-1) CB (IEC 62368-1:2014+A11) CE-LVD (EN 62368-1:2014/A11:2017) BIS (IS 13252 (Part 1):2010/IEC 60950-1:2005)
Environment	CE-RoHS (2011/65/EU) WEEE (2012/19/EU) Reach (Regulation (EC) No 1907/2006)
Protection	IP67 (IEC 60529:2013) IK10 (IEC 62262:2002)

▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION.

Level	Description
Top-level protection	Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.
Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2

	kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.
No specific protection	Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.

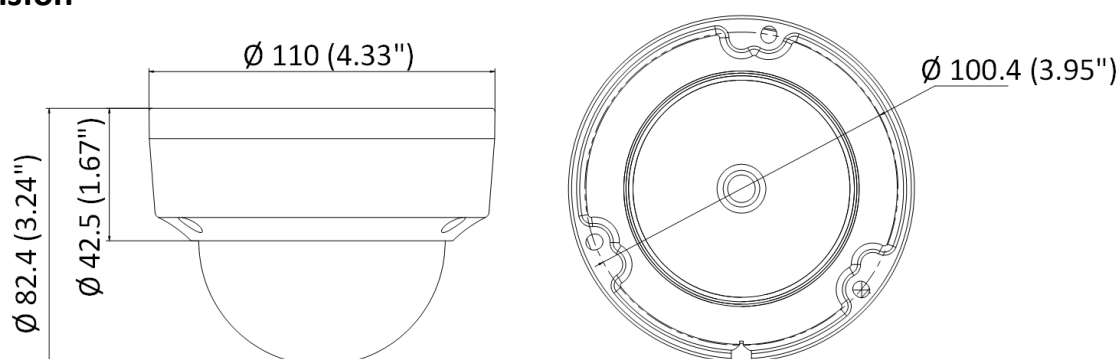
▪ Physical Interface

▪ Available Model

DS-2CD1123G0E-I(2.8mm)(C)

DS-2CD1123G0E-I(4mm)(C)

▪ Dimension



Unit: mm (inch)

▪ Accessory

















▪ Optional











DS-1250ZJ	DS-1275ZJ-SUS	DS-2210ZJ-WA-110	DS-1280ZJ-DM18	DS-1272ZJ-110B
DS-1271ZJ-110	DS-1258ZJ	DS-2200ZJ-WA-110	DS-2280ZJ-WA110	DS-1272ZJ-110
DS-1276ZJ-SUS	DS-2200ZJ-WAJ-110		DS-1259ZJ	
	0			



■ Installation Methods

Others DS-1250ZJ	Vertical Pole Mounting DS-1275ZJ-SUS+DS-22 00ZJ-WAJ-110+DS-12 53ZJ-M	Vertical Pole Mounting DS-1275ZJ-SUS+DS-22 00ZJ-WAJ-110	Vertical Pole Mounting DS-1275ZJ-SUS+DS-22 00ZJ-WAJ-110+DS-12 59ZJ	Vertical Pole Mounting DS-1275ZJ-SUS+DS-12 72ZJ-110
Vertical Pole Mounting DS-1275ZJ-SUS+DS-12 72ZJ-110+DS-1253ZJ- M	Vertical Pole Mounting DS-1275ZJ-SUS+DS-22 00ZJ-WA-110+DS-125 3ZJ-M	Vertical Pole Mounting DS-1275ZJ-SUS+DS-22 00ZJ-WAJ-110+DS-12 59ZJ+DS-1253ZJ-M	Vertical Pole Mounting DS-1275ZJ-SUS+DS-12 72ZJ-110B+DS-1253ZJ -M	Vertical Pole Mounting DS-1275ZJ-SUS+DS-22 00ZJ-WA-110
Vertical Pole Mounting DS-1275ZJ-SUS+DS-22 00ZJ-WA-110+DS-125 9ZJ	Vertical Pole Mounting DS-1275ZJ-SUS+DS-22 80ZJ-WA110	Vertical Pole Mounting DS-1275ZJ-SUS+DS-22 00ZJ-WA-110+DS-125 9ZJ+DS-1253ZJ-M	Vertical Pole Mounting DS-1275ZJ-SUS+DS-12 72ZJ-110B	Pendant Mounting DS-2210ZJ-WA-110
Pendant Mounting DS-2210ZJ-WA-110+D S-1259ZJ	Pendant Mounting DS-1271ZJ-110	Junction Box DS-1280ZJ-DM18	Junction Box DS-2280ZJ-WA110	Wall Mounting DS-1272ZJ-110B+DS-1 253ZJ-M

				
Wall Mounting DS-1272ZJ-110B	Wall Mounting DS-1258ZJ	Wall Mounting DS-2200ZJ-WA-110	Wall Mounting DS-2200ZJ-WA-110+D S-1259ZJ	Wall Mounting DS-2200ZJ-WA-110+D S-1259ZJ+DS-1253ZJ-M
				
Wall Mounting DS-2200ZJ-WA-110+D S-1253ZJ-M	Wall Mounting DS-1272ZJ-110	Wall Mounting DS-1272ZJ-110+DS-12 53ZJ-M	Wall Mounting DS-2200ZJ-WAJ-110+ DS-1259ZJ+DS-1253ZJ -M	Wall Mounting DS-2200ZJ-WAJ-110+ DS-1253ZJ-M
				
Wall Mounting DS-2200ZJ-WAJ-110+ DS-1259ZJ	Wall Mounting DS-2200ZJ-WAJ-110	Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WA-110+DS-125 9ZJ	Corner Mounting DS-1276ZJ-SUS+DS-12 72ZJ-110B+DS-1253ZJ -M	Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WA-110+DS-125 9ZJ+DS-1253ZJ-M
				
Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WAJ-110+DS-12 53ZJ-M	Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WAJ-110+DS-12 59ZJ	Corner Mounting DS-1276ZJ-SUS+DS-22 80ZJ-WA110	Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WAJ-110	Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WA-110

				
Corner Mounting DS-1276ZJ-SUS+DS-12 72ZJ-110	Corner Mounting DS-1276ZJ-SUS+DS-12 72ZJ-110B	Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WA-110+DS-125 3ZJ-M	Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WAJ-110+DS-12 59ZJ+DS-1253ZJ-M	Corner Mounting DS-1276ZJ-SUS+DS-12 72ZJ-110+DS-1253ZJ- M
				
Inclined Ceiling Mounting DS-1259ZJ				
				

See Far, Go Further



www.hikvision.com
support@hikvision.com

